Anwendung/Application :



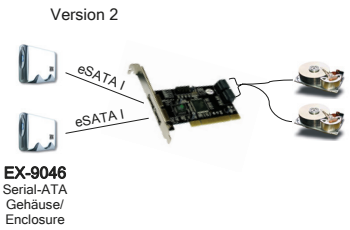

EX-9046
Serial-ATA
Gehäuse/
Enclosure

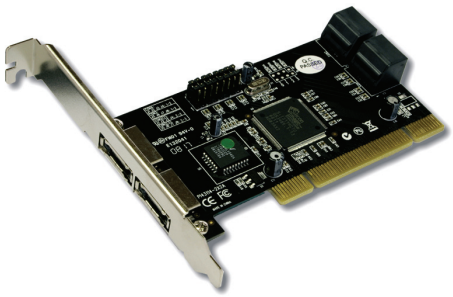

Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:
2000 xp Server 2003 Windows Vista Linux	CE FC RoHS	

eS-ATA I 4+2 HDD RAID 0/1 PCI Controller

Beschreibung :	• Der EX-3337 ist ein leistungsfähiger Serial-ATA I RAID Controller mit der PCI Technologie. Er unterstützt RAID 0 (stripping), RAID 1 (mirroring), RAID 0+1. • Der EX-3337 hat vier interne und zwei externen eS-ATA I Ausgänge um vier S-ATA I Festplatten intern oder zwei eS-ATA I Gehäuse extern anzuschließen. Der EX-3337 ist die richtige Lösung um S-ATA Geräte an einen PCI Slot anzuschließen.
Merkmale :	• RAID: Unterstützt RAID 0 (Stripping / Geschwindigkeit), RAID 1 (Mirroring / Datensicherheit) und RAID 0+1 • Zwei externe Anschlüsse für eS-ATA Gehäuse auch Bootbar • Windows basierende RAID Utilitys für Wiederherstellung des RAID • Auch gleichzeitig mit den IDE Ports vom Motherboard einsetzbar • ROM BIOS: Unterstützt Festplatten über 137GB • Befehls Mode: Unterstützt Legacy Command Queuing (LCQ) und Native Command Queuing (NCQ) • PCI Spezifikation Version 2.1 oder 2.2 • Unterstützt Motherboard mit 5V PCI-Bus und 3.3V PCI-X Bus
Chip-Set :	• Silicon Image SIL3114
Datentransfer-Rate :	• Bis 1.5Gbps
Anschlüsse :	• 4 x Interne 7 Pin S-ATA II Ports • 2 x Externe 7 Pin eS-ATA II Port
Arbeitstemperatur : **Luftfeuchtigkeit :**	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• PCI-Bus 32-Bit oder PCI-X Bus 64-Bit
Abmessung / Gewicht :	• 120 x 64mm / 300g
Lieferumfang :	• EX-3337, 2 x 7 Pin S-ATA Kabel, Treiber CD, Handbuch

eS-ATA I 4+2 HDD RAID 0/1 PCI Controller

Description:	• The EX-3337 is the most powerful Serial-ATA I RAID controller to accommodate Serial-ATA II hard drives with the technology of PCI Bus. He support RAID 0 (striping), RAID 1 (mirroring) and RAID 0+1. • The EX-3337 supports four internal S-ATA I and two external eS-ATA I ports for connect 4 internal S-ATA I hard disk or 2 external eS-ATA I enclosure. It is the right choice for a PCI Bus to S-ATA I versatile devices.
Feature :	• RAID: Support RAID 0 (stripping / performance) and RAID 1 (mirroring / data security) and RAID 0+1 • Two external connector for eS-ATA Enclosure, it's also bootable • Supports Legacy Command Queuing (LCQ), Supports Native Command Queuing (NCQ) • Co-resides with Motherboard IDE devices • Bundle Windows based RAID utilities for rebuilding array • ROM BIOS: Support hard drives greater then 137GB • Compliant PCI version 2.1 and 2.2 • Support Motherboard with 5V PCI-Bus and 3.3V PCI-X Bus
Chip-Set :	• Silicon Image SIL3114
Data transfer rate :	• Up to 1.5Gbps
Connectors :	• 4 x Internal 7 Pin S-ATA II connectors • 2 x External 7 pin eS-ATA II connector
Operating Temperature : **Operating Humidity :**	• 0 up to 55^{0}C • 5 up to 95%
Hardware system :	• PCI-Bus 32-Bit or PCI-X Bus 64-Bit
Size / Weight :	• 120 x 64mm / 300g
Packaging contents :	• EX-3337, 2 x 7 Pin S-ATA cable, Driver CD, Manual