EX-1167

Anwendung / Application

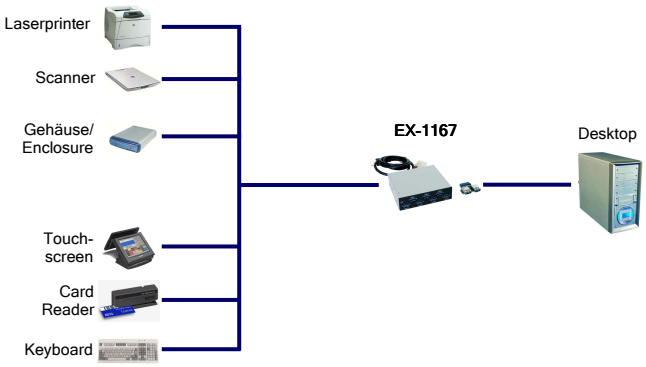

Interner USB 3.0 HUB mit 7 Ports für 3.5“ Front-Einbau

Beschreibung

Mit der EX-1167 erweitern Sie einen USB 3.0 Ausgang von Desktop Rechner um sieben weitere USB 3.0 Ports. Die EX-1167 wird in einen freien 3.5“ Front-Bay Schacht vom PC eingebaut. Es ist somit möglich bis zu sieben externen USB 2.0 oder 3.0 Peripheriegeräte an einen USB 2.0 oder 3.0 Port vom Desktop Rechner anzuschließen.

Merkmale

- Interner USB 3.0 HUB mit 7 Ports
- Automatische Erkennung der Datentransfer-Rate für die angeschlossenen Peripheriegeräte
- Unterstützt alle USB 1.1 bis 3.0 Kompatiblen Peripheriegeräte
- Unterstützt 900mA USB Bus Power für jeden Ausgang
- Stromversorgung: vom USB Bus (Bus Power) oder PC-Netzteil

Spezifikationen

- **Chip-Set:** VIA VL810
- **Datentransfer-Rate:** 120Mbps bis 5Gbps
- **Anschlüsse**: 1 x A-Stecker Upstream
1 x DC Jack 5V
- **Hardwaresysteme:** USB 2.0 oder 3.0
- **Treiber:** Benötigt keine Treiber (Standard HUB)
- **Betriebssysteme:** WinCE/ 2000/ XP/ Vista/ 7/ 8 (32&64bit) Server(2000, 2003 & 2008), Linux
- **Betriebstemperatur :** 0^0 bis 55^0 Celsius
- **Lagertemperatur:** -20^0 bis 85^0 Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** 5Volt
- **Abmessung:** 100 x 90 x 25 mm
- **Gewicht**: 300g
- **Lieferumfang**: EX-1167, Adapter Motherboard Anschluss zu 2 x A-Buchse, Handbuch

Internal USB 3.0 HUB with 7 Ports for 3.5-inch Front-Bay

Description

With the EX-1167 you can extend from one USB 3.0 port to seven USB 3.0 ports. The EX-1167 will be installed in to a 3.5-inch front bay from your computer system. It’s possible now to connect up to seven external USB 2.0 or 3.0 peripherals devices to one USB 3.0 port from the Desktop Computer.

Features

- Internal USB 3.0 HUB with 7 ports
- Automatic recognition the data transfer rate for the attached external peripheral devices
- Support all USB 1.1 to 3.0 compatible devices
- Support 900mA USB Bus Power for each port
- Power from the USB Bus (Bus Power) or Computer power supply

Specifications

- **Chip-Set:** VIA VL810
- **Data transfer rate:** 120Mbps bis 5Gbps
- **Connectors**: 1 x A-Male Upstream
1 x DC Jack 5V
- **Hardware system:** USB 2.0 or 3.0
- **Driver:** No driver necessary (Standard HUB)
- **Operating systems:** WinCE/ 2000/ XP/ Vista/ 7/ 8 (32&64bit) Server(2000, 2003 & 2008), Linux
- **Operating Temperature :** 32^0 up to 131^0 Fahrenheit
- **Storage Temperature:** -20^0 up to 167^0 Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 5Volt
- **Size:** 100 x 90 x 25 mm
- **Weight**: 300g
- **Packaging contents**: EX-1167, Adapter Motherboard Connector to 2 x A-Female, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging