

# 8 Port KVM Switch



(Front)




(Back)



## Maximise Data Center Control !

The Master View™ CS-88A can control up to 8 computers directly and since units can be cascaded to three levels, in a full three stage installation up to 73 CS-88A units can control up to 512 computers - all from a single KVM (keyboard, monitor and mouse) console !

### Diagram

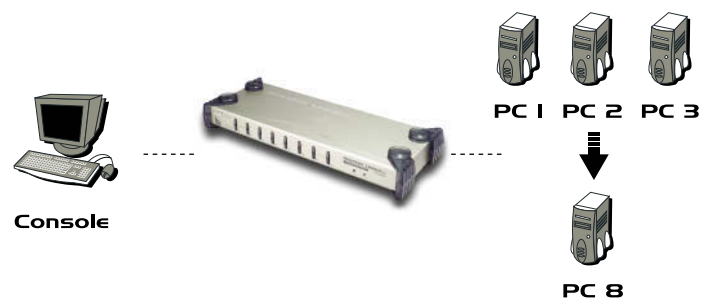

Model: **CS-88A**

### Features

- Controls 8 computers from a single console
- Cascadable from any port to three levels - control of up to 512 computers from a single console
- NEW Two-level (Administrator/User) password authorization for enhanced security protection (PSP)**
- Intelligent OSD (On Screen Display) and hotkey switching for efficient system handling
- OSD Port List display automatically expands when switches are cascaded
- OSD display dynamically adjusts to resolution changes
- No Software required - computer selection via front panel switches, hotkeys, or OSD
- NEW Two Hotkey invocation methods - solves key conflict problems with running programs**
- Auto scan feature for monitoring user-selected computers
- Hot pluggable - add or remove computers without powering off the switch
- PS/2 mouse emulation for error-free system bootup
- Console's PS/2 mouse controls all connected computers
- PS/2 compatible mouse support - Microsoft Intellimouse Explorer and Logitech FirstMouse+ support
- NEW Independent DDC2B emulation for every computer port.**
- NEW Superior video quality: up to 2048 x 1536; DDC; DDC2; DDC2B**
- Patented ASIC design for enhanced functionality and compatibility
- Rack mountable in 19" (1U) system rack

### Specifications:

Function	Specification
Computer	Direct 8
Connections	Max 512 (via Cascade)
Port Selection	Front Panel Switches Hotkeys On Screen Display
LEDs	Power 1 (Blue) On Line Port 8 (Orange) Selected Port 8 (Green)
Connectors	Keyboard 1 x 6 pin mini-DIN female - Console 8 x 6 pin mini-DIN female - CPU Ports Mouse 1 x 6 pin mini-DIN female - Console 8 x 6 pin mini-DIN female - CPU Ports Video 1 x HDB-15 female - Console 8 x HDB-15 male - CPU Ports
Scan Interval (OSD Select)	1 - 255 secs. (def. 5 secs.)
Power Consumption	DC 9V; 1.08W (max)
Operating Temperature	0 - 50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH; Noncondensing
Housing	Metal
Weight	2850 g
Dimensions (L x W x H)	433 x 150 x 44.5 mm (19" 1U)