


Master View KVM Switch CS-9134

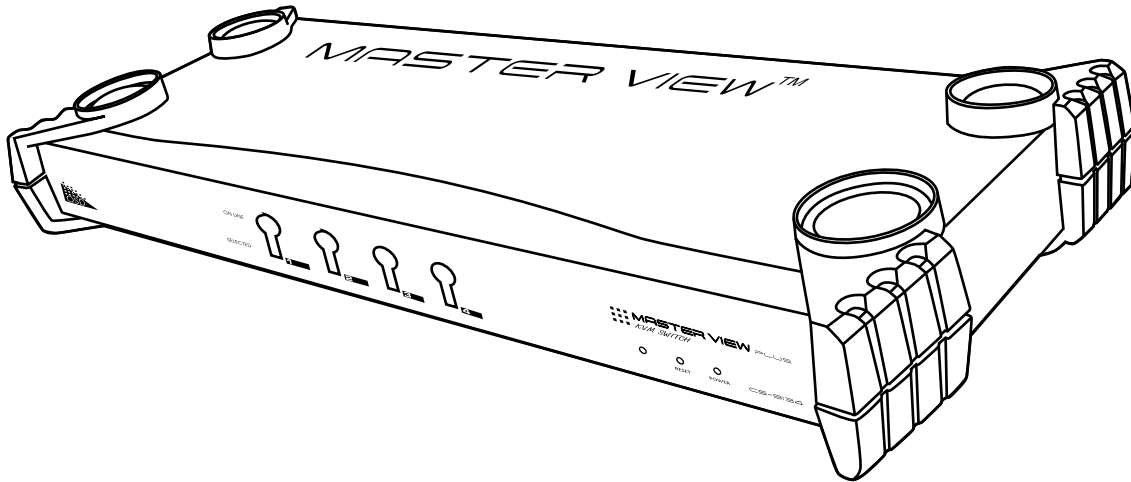

FEATURES

- Cascadable
- (a) Up Link to CS-428: support up to 4*CS-9134 uplink to CS-428 and didn't support downlink to any CS device in this link type, so it can control up to 32 PCs.
- (b) Down Link: the current version only can cascade the CS-9134 to 3 levels, control up to 64 PCs from a single console.
- No software required
- PC selection via front panel switches, Hot Keys, or OSD (On Screen Display)
- Quick View Scan feature for monitoring selected PCs
- PS/2 and serial mouse emulation provided for system boot up
- Console's PS/2 mouse controls all connected PCs - Even those with serial mice
- Support PS/2 compatible mouse, Microsoft Intellimouse Explorer and Logitech FirstMouse+ (*).
- SVGA, VGA and Multisync monitor support
- LED display for easy status monitoring
- Supports high quality CS series custom connector cables
- Rack mountable in 19"(1U) system rack
- Hot pluggable - add or remove PCs for maintenance without powering down the switch
- Supports DDC; DDC2; DDC2B, up to 1920*1440 resolution

Specification

FUNCTION		SPECIFICATION	
Power Consumption		DC 9V, 1080mW(max.)	
Reset Button		1 Set	
Connectors	Keyboard	Console	1*6 pin mini-DIN Female (PS/2)
		CPU Ports	4*6 pin mini-DIN Female (PS/2)
	Mouse	Console	1*6 pin mini-DIN Female (PS/2)
		CPU Ports	4*6 pin mini-DIN Female (PS/2)
	Video	Console	1*HDB-15 Female (STD. VGA/SVGA)
		CPU Ports	4*HDB-15 Male (STD. VGA/SVGA)
LEDs	Power	Blue*1	
	On Line	Green*4	
	Selected	Orange*4	
PC	Direct	4	
Connections	Max (Daisy Chain)	64	
PC Selection		Hot Keys / Push buttons / OSD	
Emulation	Keyboard	PS/2 & PC/AT	
	Mouse	PS/2 & Serial	
VGA Resolution		1920 x 1440 DDC ,DDC2, DDC2B	
Scan Interval		3,5,10,15,20,30,40,60 Sec.	
OSD Activation		[Ctrl + Ctrl] or [Scroll Lock + Scroll Lock]	
Housing		Metal	
Weight		2500 g	
Dimensions (L*W*H)		483x150x44.5 mm (1U)	

ATEN INTERNATIONAL CO., LTD.

TEL:886-2-8692-6789 FAX:886-2-8692-6767

CS-9134