


# MASTER VIEW™ PRO

## QUARTER ACCESS KVM SWITCH

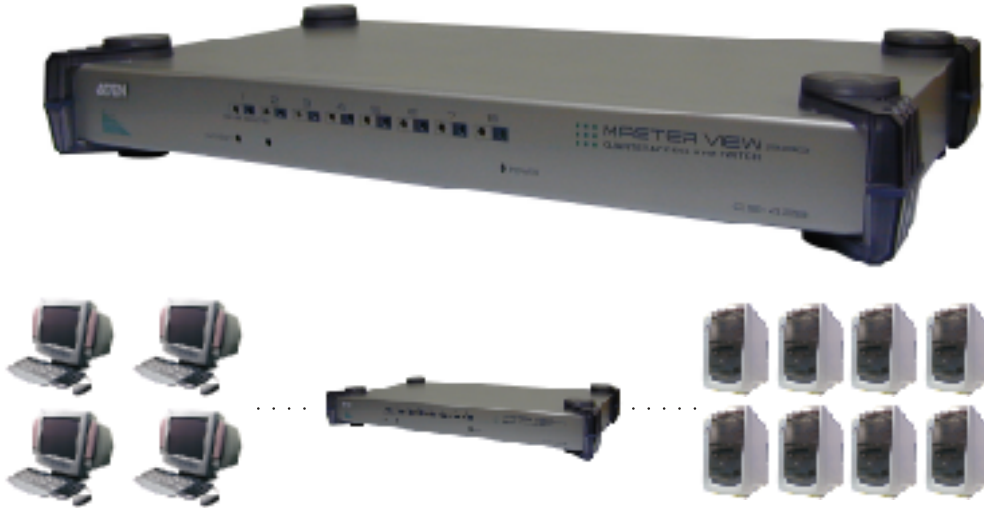

### Features

- Up To Four Users Can Operate Up To 64 Computers (via Cascade to CS-138A) At The Same Time
  - Each Console Has Its Own Access Control
  - Two Level Password Security (Administrator / User)
  - Administrator Can Access Any Computer Completely Independently of The Other Users
  - OSD (On Screen Display) Automatically Adjusts to Resolution Changes
  - Auto Expansion of The OSD Port List For Cascaded Installations
  - Port Selection via OSD
  - Hot Pluggable, Add or Remove any Computer without Powering Off the Switch
  - Auto Scan Function Provides Easy Monitoring of All Computers
  - Supports 1920\*1440 Resolution; DDC2 (Display Data Channel 2)
  - PS/2 Compatible Mouse Support: Microsoft Intellimouse Pro, Logitech FirstMouse, FirstMouse+, Support\*
  - Audio (Microphone and Speaker) Support
  - Special Design For Easy Stacking
  - Rack Mountable in 19" (1U) System Rack.
- \* 1. PS/2 compatible mouse support is for three button (wheel) mice.  
 2. The Logitech Mouse Ware program's Change Device procedure does not work on Microsoft NT systems.

### Specifications

Function		Specification
Computer Connections	Direct	8
	Max	64 (via Cascade)
Port Selection		OSD (On Screen Display)
LEDs	Power	1 (Blue)
	On Line	8 (Orange)
	Selected	8 (Green)
	Keyboard	2 x 6 pin mini-DIN Female
Console 1 & 2 Connectors	Mouse	2 x 6 pin mini-DIN Female
	Video	2 x HDB-15 Female
	Audio	2 x Microphone Jacks
		2 x Speaker Jacks
Console 3 & 4 Connectors		2 x 25 pin D - Type Female
Computer Port Connectors		8 x 25 pin D - Type Female
Scan Interval (OSD Select)		User Specified 1 - 255 seconds
Emulation	Keyboard	PS/2 & PC/AT
	Mouse	PS/2 & Serial
Video		1920 x 1440; DDC2
Power Consumption		DC 9V, 7.2 W
Operating Temperature		5 ~ 40° C
Storage Temperature		-20 ~ 60° C
Humidity		0 ~ 80% RH, Noncondensing
Housing		Metal
Weight		4200 g
Dimensions (L x W x H)		433.5 x 254.2 x 44mm (19" 1U)

### Cables

Connector Type	CS Custom Cable
Consoles 3 and 4	2L-1701S
AT (5 pin DIN) Keyboard and Serial Mouse	2L-1701P + Keyboard & Mouse Adapters
PS/2 (6 pin mini-DIN) Keyboard and Mouse	2L-1701P
Cascading to CS-138A or CS-9138	2L-1601P

**ATEN INTERNATIONAL CO., LTD.**

**TEL:886-2-8692-6789 FAX:886-2-8692-6767**

**CS-428**